


Light Source Test Report

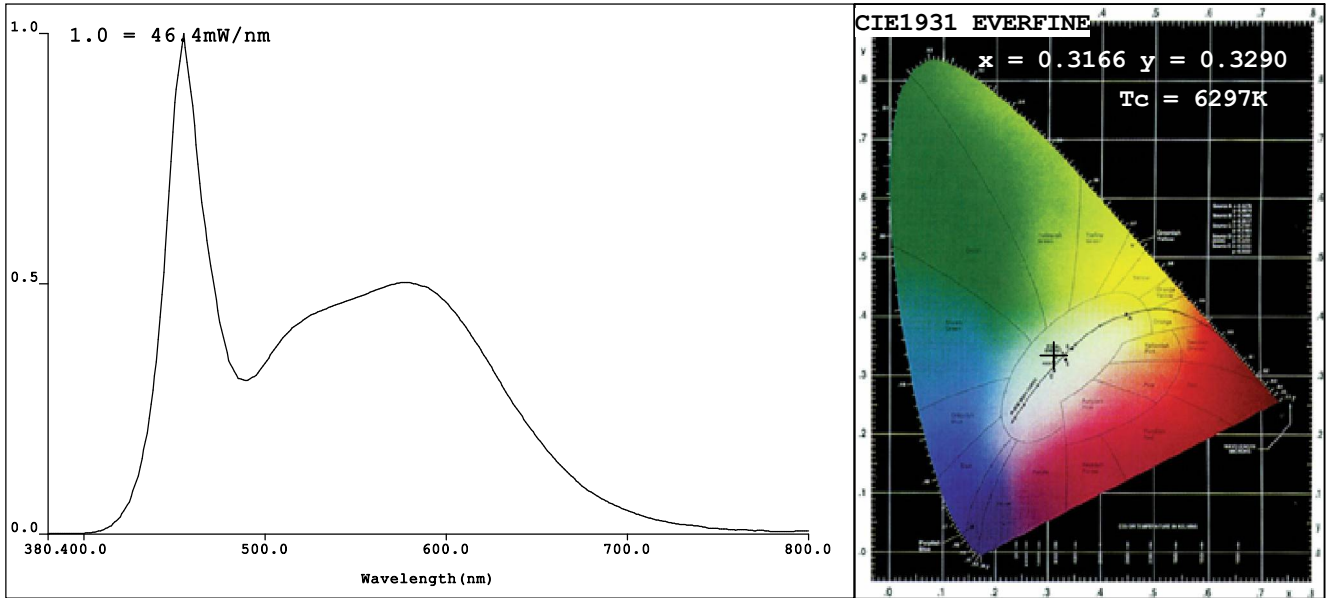

CIE Color Parameters:

Chromaticity Coordinate: $x=0.3166$ $y=0.3290$ / $u=0.2005$ $v=0.3126$ ($duv=1.25e-00$)
CCT: $T_c=6297K$ Prcp WaveL: $\lambda_d=488.3nm$ Purity=6.0%
Peak WaveL: $\lambda_p=455nm$ Half Width: $\Delta\lambda_p=28.1nm$ Ratio: R=14.0% G=79.7% B=6.3%
Average Wave: 540nm
Rendering Index: $R_a=84.7$
R1 =84 R2 =93 R3 =94 R4 =81 R5 =84 R6 =87 R7 =86 R8 =68
R9 =11 R10=82 R11=81 R12=62 R13=87 R14=98 R15=79

Photo Parameters:

Flux: $\Phi=1494.6(lm)$ Luminous Efficacy: 105.82(lm/W) Luminous Power: $P=4.863(W)$

Electrical Parameters:

U=24.00V I=0.5885A P=14.12W PF=1.000

Instrument Status:

Scan Range: 380.0nm-800.0nm Interval: 5.0nm Ip = 6651(G=2,D=44)
REF = 52254 TMP(PMT) = 30.6degrees centigrade Test Mode: Fast Test

Product Type: TZ-283560mA6000K-24 Manufacturer:
Instrument: PMS-50 System Test Department:
Temperature: 31.6deg Humidity: 65.0%
Test Operator: Damin Test Date: 2016-06-22 14:15